

CORETEC® 6" WPC

CT648 Crest



003 Boss Chestnut



001 Soft Chestnut



002 New Chestnut



004 Light Oak




005 Beach Oak



008 Casper Oak



009 Frost Chestnut

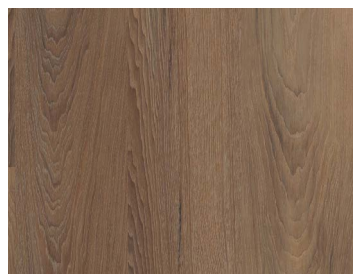

010 Ida Chestnut



012 Snowy Chestnut

CORETEC® 6" WPC

CT648 Crest

	US Units	Metric Units
Style Number	CT648	
Construction	Waterproof Foam Core	
Edge Profile	Micro Bevel	
Nominal Dimensions	6" wide, 48" long	
Actual Product Width	5.91"	15cm
Actual Product Length	48.02"	122cm
Wear Layer Thickness	12 mil (0.02")	0.3mm
Overall Product Thickness	0.255"	6.5mm
Core Thickness	0.217	5.5mm
Attached Underlayment	Attached Cork	
Attached Underlayment	0.039"	1mm
Thickness		
Finish	UV Acrylic	
Installation Methods	Floating or Direct Glue	
Profile	Angle / Tap	
Country of Origin	Imported	

Area per Box	31.52 SF	3 SM
Pieces per Box	16 pieces	
Weight per Box	46.96 lb	22.3 kg
Boxes per Pallet	42 boxes	

Static Load (ASTM F970)	Passes
Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Smoke Density (ASTM E662)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	ADA compliant

25 Year Residential Limited Warranty

5 Year Light Commercial Warranty