


RE7

BRONZE LVP

WW571 BAY 6 Glue

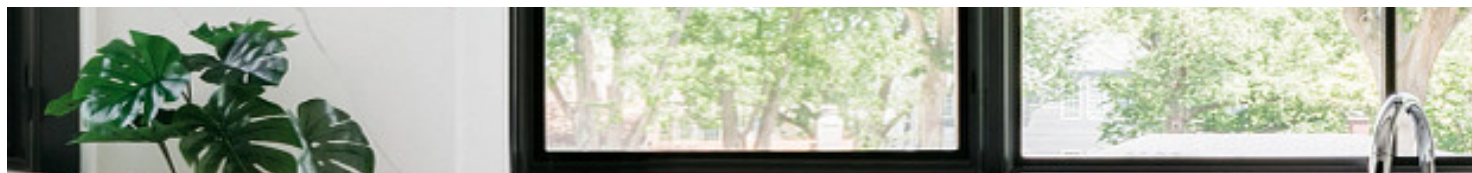

UPGRADE TO WW572 BAY 12 GLUE DOWN
with a 12 mil wear layer



2130 Timber

RE7

BRONZE LVP

WW571 BAY 6 Glue

Construction	Residential Resilient LVT-Drybac<=2Mm	
Profile	Direct Glue	
Size	7" x 48"	17.78 cm x 121.92 cm
Overall Thickness	0.079"	2 mm
Wear Layer Thickness	6 mil (0.006")	0.2 mm
Edge Description	Square	
Area per Carton	51.33 sq ft	4.77 sq m
Area per Pallet	2566.5 sq ft	238.44 sq m
Installation Methods	Direct Glue	
Installation Grade	Above, On, Below	
FloorScore Certified	Yes	
Residential Warranty	15 Year Residential Resilient Limited Warranty	
Installation	Residential Resilient Direct Glue Installation Guidelines	
Maintenance	Residential Resilient Maintenance	
Smoke Density (ASTM E662, Flaming Mode)	Passes, <450	
Radiant Panel (ASTM E648)	Passes, Class I	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

