
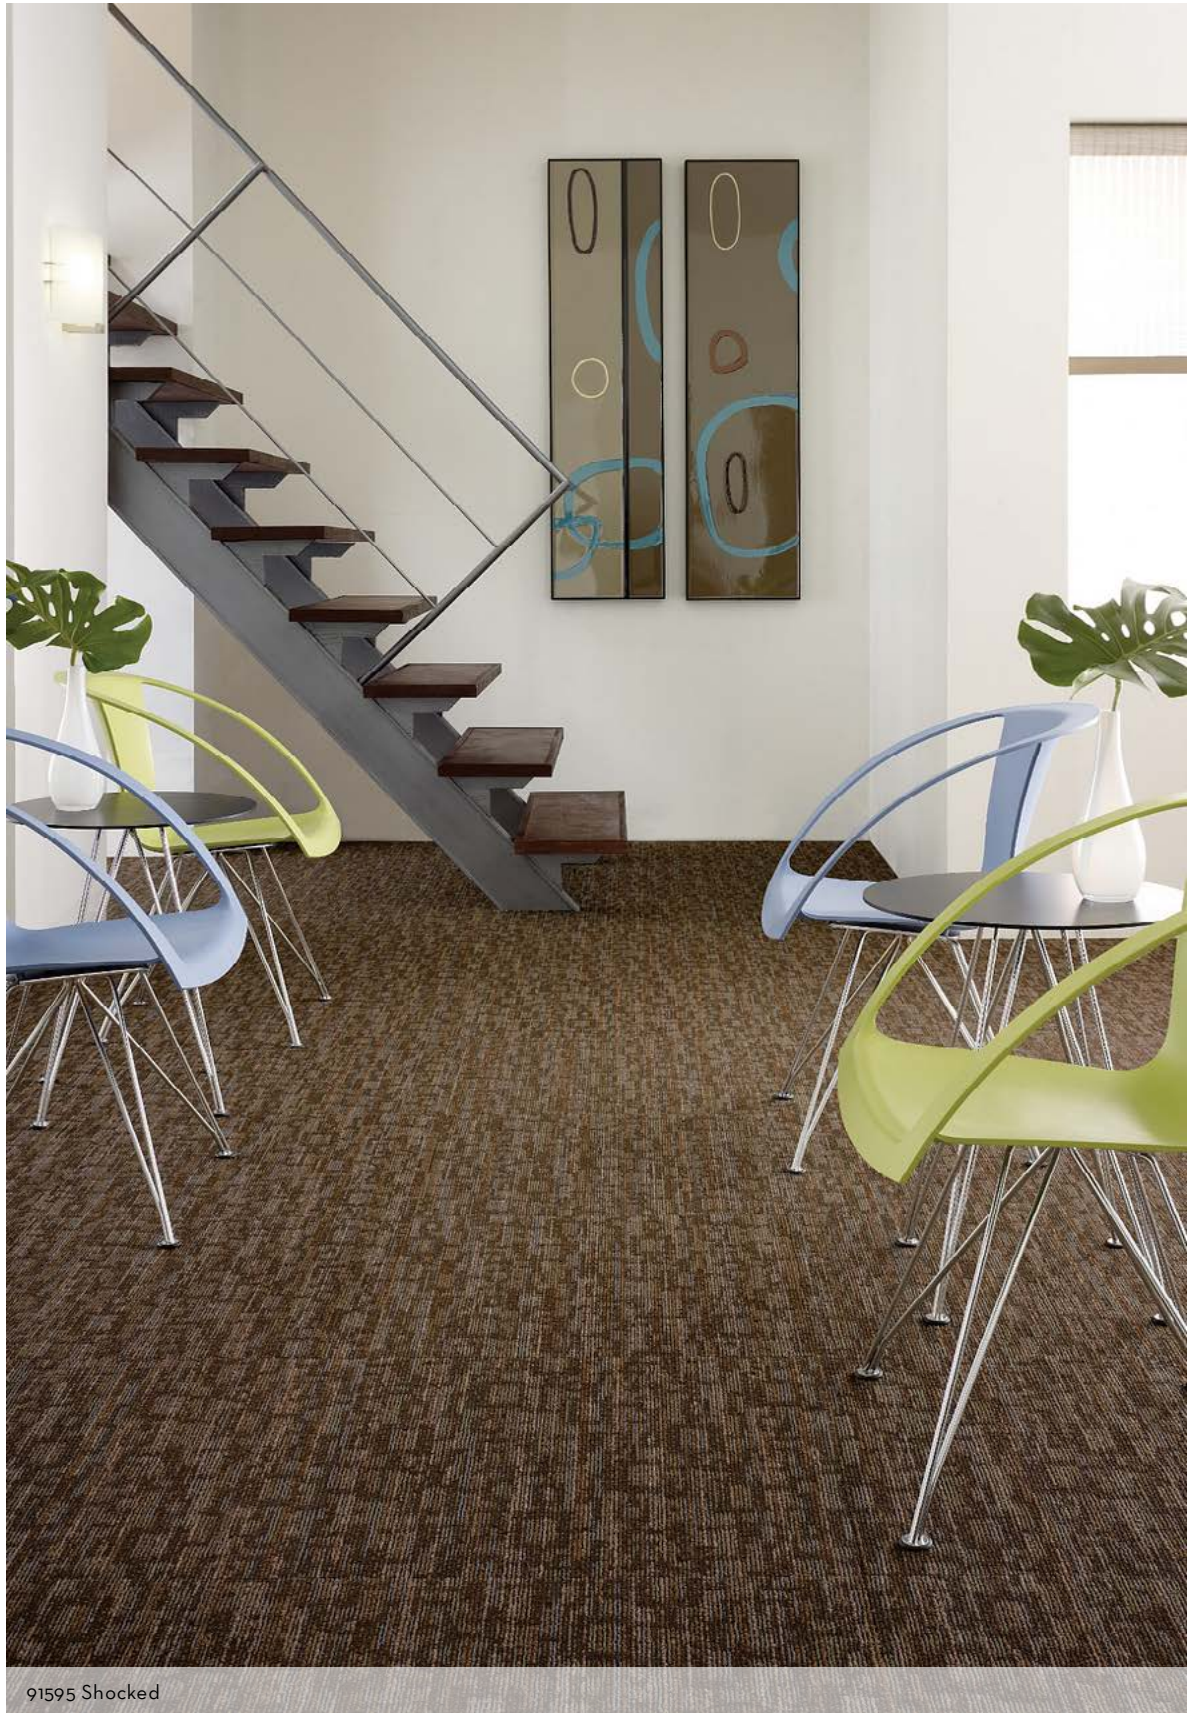


# COMMERCIAL

## Circuit Breaker CT (758M2 COM CAR)

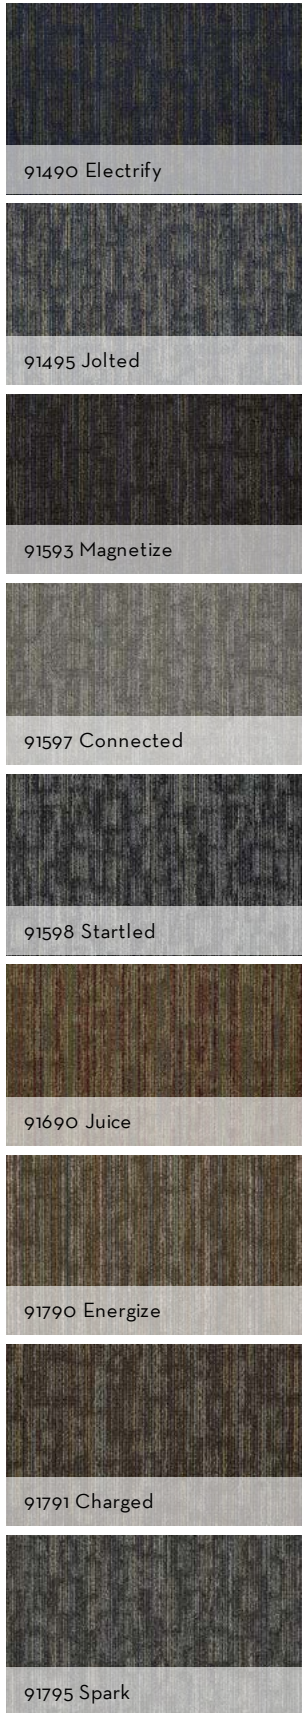


# COMMERCIAL

## Circuit Breaker CT (758M2 COM CAR)

Product Type	Carpet Tile	
Construction	Multi-Level Pattern Loop	
Fiber	Eco Solution Q® Nylon	
Dye Method	SOLUTION DYED	
Primary Backing	Synthetic	
Secondary Backing	Ecoworx	
Protective Treatments	SSP Protective Treatments	
	U.S.	Metric
Product Size	24 in x 24 in	6096 cm x 6096 cm
Area Per Carton	48 ft <sup>2</sup>	4.46 m <sup>2</sup>
Pieces Per Carton	12	
Gauge	1/10 in	39.37 per 10 cm
Stitches	8 per in	30 per 10 cm
Finished Pile Thickness	0.132 in	3.35 mm
Average Density	4091 oz/yd <sup>3</sup>	
Total Thickness	0.271 in	6.88 mm
Tufted Weight	15 oz/yd <sup>2</sup>	508.6 g/m <sup>2</sup>

### Recommended Installation Methods

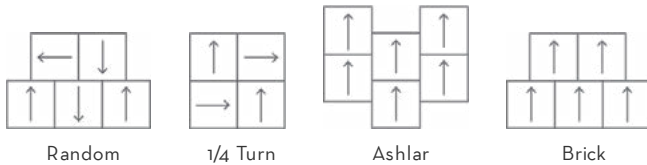

### Performance Testing

Pill Test	Pass
Radiant Panel	Class I
NBS Smoke	Less than 450
Electrostatic Propensity	Less than 3.5 kv
CRI Greenlabel Plus	GLP9968
ADA Compliance	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

### Warranties

Carpet Tile Lifetime Commercial Limited Warranty with Stain and Color

### Environmental

Recycled Content Pre-consumer - 44%, Post-consumer - 0%

Specifications are subject to nominal manufacturing variance.  
Material supply and/or manufacturing processes may necessitate changes without notice.