

# CARPET TILE

ROCK



# CARPET TILE


ROCK

Product Type	<b>Carpet Tile</b>
Construction	<b>Multi-Level Pattern Loop</b>
Fiber	<b>Solution Q® Nylon</b>
Dye Method	<b>Solution Dyed</b>
Primary Backing	<b>Synthetic</b>
Secondary Backing	<b>StrataWorx</b>
Traffic Rating	<b>Heavy</b>
Protective Treatments	<b>SSP Shaw Soil Protection</b>

	U.S.	Metric
Product Size	<b>24 in x 24 in</b>	<b>60.96 cm x 60.96 cm</b>
Area Per Carton	<b>80 ft<sup>2</sup></b>	<b>7.43 m<sup>2</sup></b>
Pieces Per Carton	<b>20</b>	
Gauge	<b>1/10 in</b>	<b>3.937 per 10 cm</b>
Stitches	<b>9 per in</b>	<b>35 per 10 cm</b>
Finished Pile Thickness	<b>0.087 in</b>	<b>2.21 mm</b>
Average Density	<b>5793 oz/yd<sup>3</sup></b>	
Total Thickness	<b>0.249 in</b>	<b>6.32 mm</b>
Tufted Weight	<b>14 oz/yd<sup>2</sup></b>	<b>474.7 g/m<sup>2</sup></b>



## Recommended Installation Methods

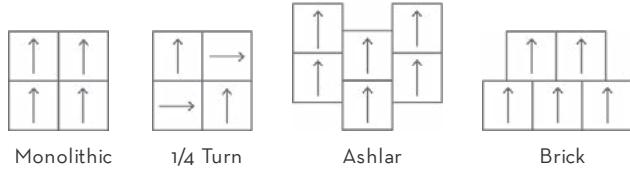

Monolithic

1/4 Turn

Ashlar

Brick

# CARPET TILE

ROCK



# CARPET TILE

ROCK

## Performance Testing

Pill Test	Pass
Radiant Panel	Class I
NBS Smoke	Less than 450
Electrostatic Propensity	Less than 3.5 kv
CRI Greenlabel Plus	GLP2671
ADA Compliance	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Warranties

Carpet Tile 15 year Commercial Limited Warranty with Stain and Color for StrataWorx

## Environmental

Recycled Content

Pre-consumer - 25%, Post-consumer - <1%

Specifications are subject to nominal manufacturing variance.

Material supply and/or manufacturing processes may necessitate changes without notice.



44100 Brilliant




44405 Cleverish




44505 Masterful



44705 Scholarly

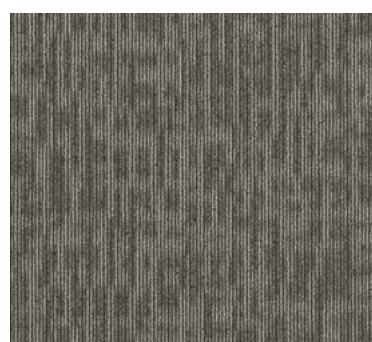

44710 Smarts

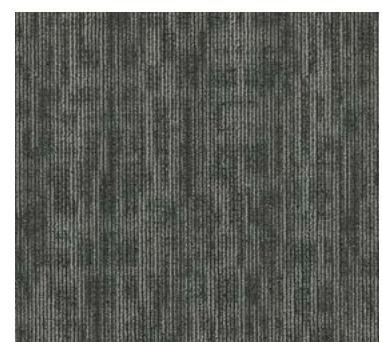

44515 Sharp