


COMMERCIAL

Overload CT
(758M3 COM CAR)



92490 Electrify



92495 Jolted



92593 Magnetize



92597 Connected




92598 Startled




92690 Juice



92790 Energize



92791 Charged



92795 Spark



92595 Shocked




COMMERCIAL

Overload CT (758M3 COM CAR)

Product Type	Carpet Tile	
Construction	Textured Loop	
Fiber	Eco Solution Q® Nylon	
Dye Method	Solution Dyed	
Primary Backing	Synthetic	
Secondary Backing	Ecoworx	
Protective Treatments	SSP Protective Treatments	
	U.S.	Metric
Product Size	24 in x 24 in	6096 cm x 6096 cm
Area Per Carton	48 ft ²	4.46 m ²
Pieces Per Carton	12	
Gauge	1/10 in	3937 per 10 cm
Stitches	9 per in	33 per 10 cm
Finished Pile Thickness	0.094 in	2.39 mm
Average Density	5362 oz/yd ³	
Total Thickness	0.246 in	6.25 mm
Tufted Weight	14 oz/yd ²	474.7 g/m ²
GSA Approved Product	Yes	

Recommended Installation Methods

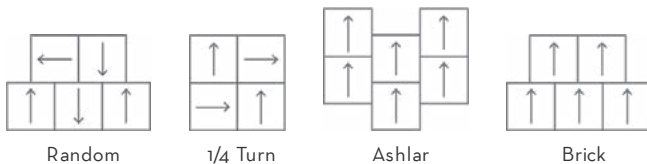

Performance Testing

Pill Test	Pass
Radiant Panel	Class I
NBS Smoke	Less than 450
Electrostatic Propensity	Less than 3.5 kv
CRI Greenlabel Plus	GLP9968
ADA Compliance	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Warranties

Carpet Tile Lifetime Commercial Limited Warranty with Stain and Color

Environmental

Recycled Content Pre-consumer - 44%, Post-consumer - 0%

Specifications are subject to nominal manufacturing variance.
Material supply and/or manufacturing processes may necessitate changes without notice.