


CORETEC® 7"


Endure CP748



705 Ivory Coast

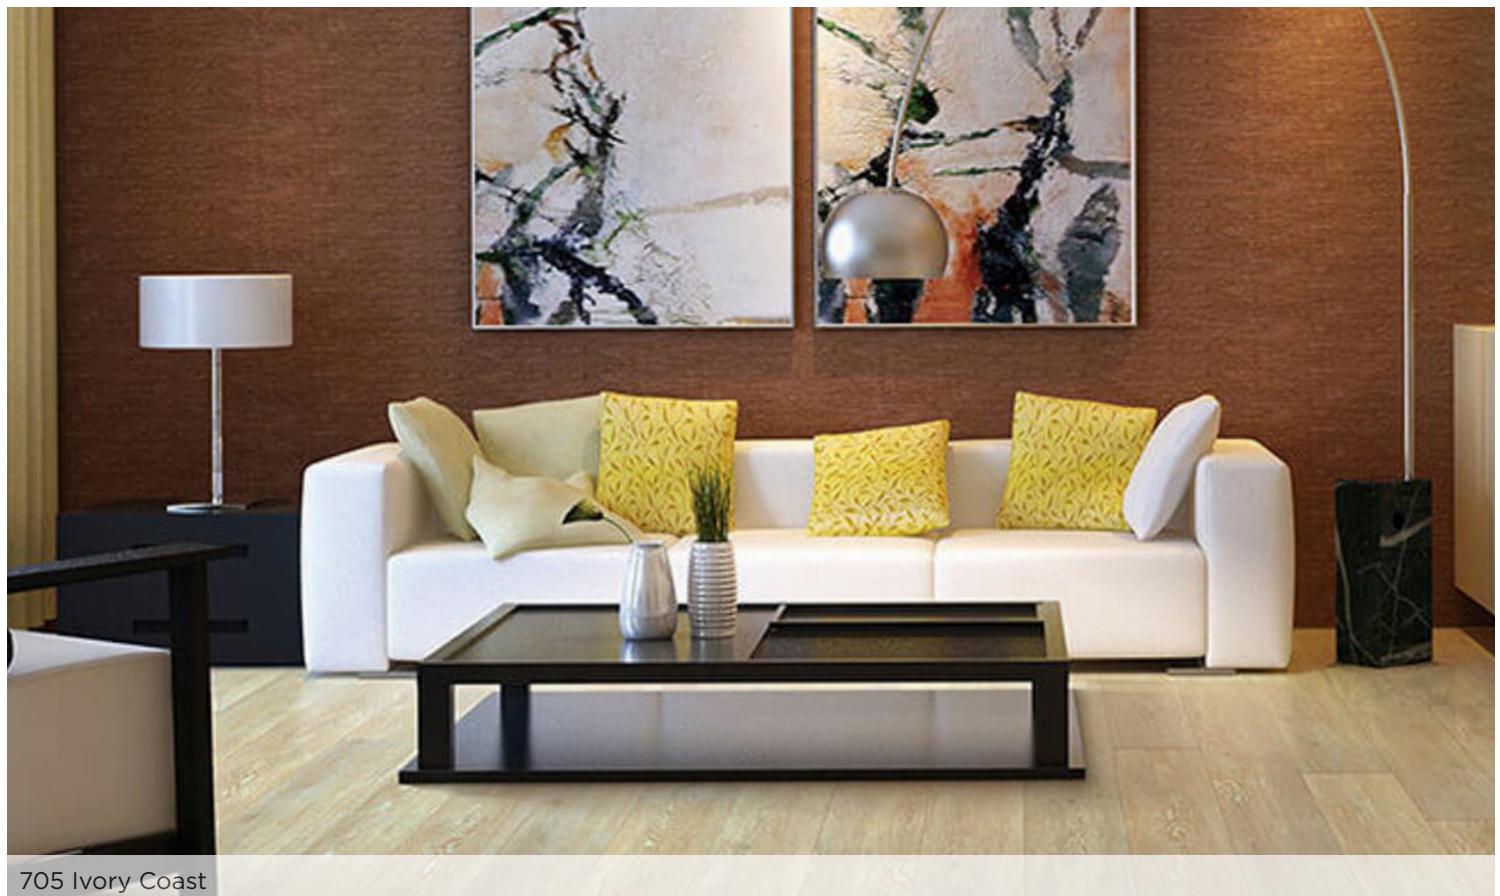

707 Tawny Oak




712 Grey Oak




707 Fog Oak



714 Tepid Oak



716 Amber Oak



715 Hearty Oak



705 Snowy Coast



211 Coastal Oak



210 Coffee Oak



709 Burnished Oak

CORETEC® 7"

Endure CP748

| | US Units | Metric Units |
|----------------------------------|-------------------------|--------------|
| Style Number | CP748 | |
| Construction | Waterproof Foam Core | 8mm |
| Edge Profile | Micro Bevel | 0.5mm |
| Nominal Dimensions | 7" wide, 48" long | |
| Actual Product Width | 7.13" | 18.11 cm |
| Actual Product Length | 48.03" | 122 cm |
| Wear Layer Thickness | 20 mil (0.02") | 0.5mm |
| Overall Product Thickness | 0.314" | 8mm |
| Core Thickness | 0.256' | 6.5mm |
| Attached Underlayment | Attached Cork | |
| Attached Underlayment | 0.059" | 1.5mm |
| Thickness | | |
| Finish | UV Acrylic | |
| Installation Methods | Floating or Direct Glue | |
| Profile | Angle / Tap | |
| Country of Origin | Imported | |

| | | |
|-------------------------|-----------|----------|
| Area per Box | 38.24 SF | 3.55 SM |
| Pieces per Box | 16 pieces | |
| Weight per Box | 44.09 lb | 19.99 kg |
| Boxes per Pallet | 42 boxes | |

| | |
|--|-----------------|
| Static Load (ASTM F970) | Passes |
| Residual Indentation (ASTM F1914) | Passes |
| Resistance to Heat (ASTM F1514) | Passes |
| Resistance to Light (ASTM F1515) | Passes |
| Resistance to Chemicals (ASTM F925) | Passes |
| Smoke Density (ASTM E662) | Passes |
| Radiant Panel (ASTM E648) | Passes, Class I |
| Slip Resistance (ASTM D2047) | ADA compliant |

| |
|--|
| Lifetime Limited Warranty |
| Waterproof Core Commercial Warranty |
| Commercial Ub Bond 4100/4151 |

| |
|---|
| FloorScore Certified |
| GreenGuard (Certification Gold, Private Label) Certified |