
LUXURY VINYL

PROCORE+ WW535

Construction	Multilayer SPC with Acoustic Backing		
Profile	Click		
Size	7" x 48"	17.78 cm x 121.92 cm	
Overall Thickness	0.189"	4.8 mm	
Wear Layer Thickness	12 mil (0.012")	0.3 mm	
Attached Underlayment	EVA Pad		
Attached Underlayment Thickness	0.059"	1.5 mm	
Finish	ArmourBead®		
Edge Description	Micro-Bevel		
Area per Carton	18.67 sq ft	1.73 sq m	
Area per Pallet	1493.6 sq ft	138.76 sq m	
Installation	Floating	138.76 sq m WATER	
Installation Grade	Above, On, Below	\ PROOF	
Ortho-Phthalates Free	Yes		
Residential Warranty	30 Years		
Commercial Warranty	7 Year Light Commercial		
Smoke Density (ASTM E662, Flaming	Passes, <450		
Mode)			
Radiant Panel (ASTM E648)	Passes, Class I		

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to




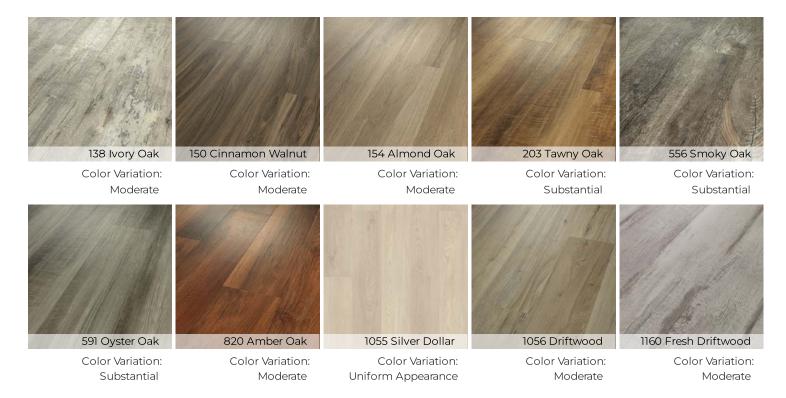



LUXURY VINYL

PROCORE+ WW535

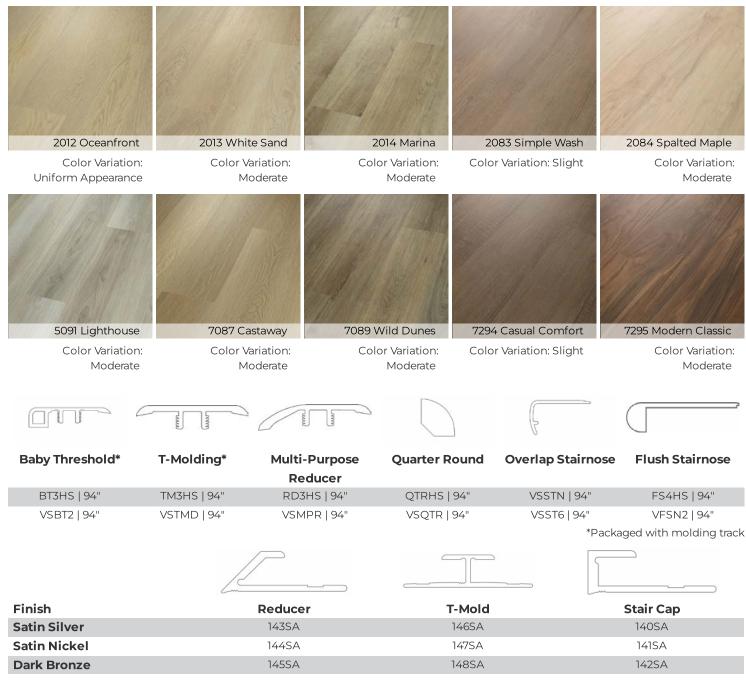

Installation Range

Installation Range		TREADZ®	TREADZ®		
Profile Size	Installation Range	Center	LVCTR		
3.5mm	1.5mm to 3.5mm heights	Right	LVCAR		
5.5mm	3.6mm to 5.5mm heights	Left	LVCAL		
8mm	6mm to 8mm heights	White Riser	LVWRI*		

*packages of 3



